



Style 525 1:8 Scale

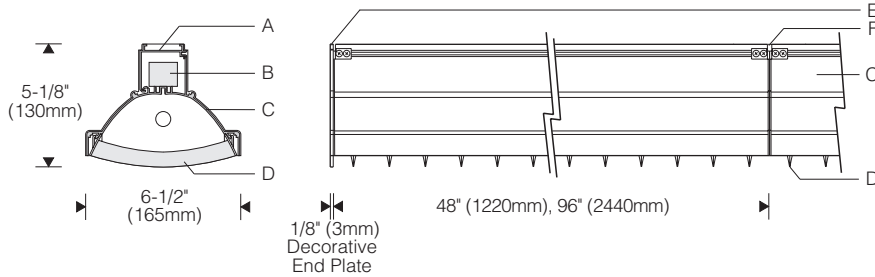


Top View (S mount)




Installation (X mount - cables shown)


1. Hang mounting plate on stems or cables
2. Hang housing, connect supply
3. Hinge up, secure with screws.

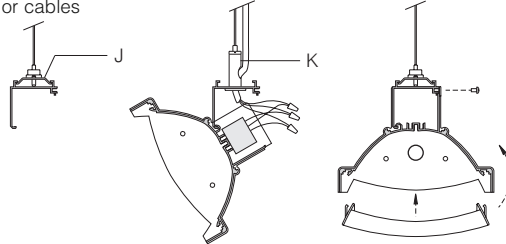

Pendant Stems (X mount)



Cables (X mount)



Specifications

- | | | | |
|---|--|---|---|
| A Extruded aluminum mounting plate | D Snap-in semi-specular parabolic cross-baffle, blades 1-1/2" o.c., 25° shielding | F Aluminum joiner/reveal plates | J Joiner bracket |
| B Electronic ballast | E Aluminum decorative end plate (3 profiles – order separately) | G Mounting holes, 9/32" (7mm) dia. (S mount) | K Power feed |
| C Specular extruded aluminum reflector housing | | H Knockout, (2) 7/8" (22mm) dia. (S mount) | L 18/4 cord with cable clips (cable mount) |

Finish:

Semi-gloss white or bright clear anodized aluminum housing with semi-gloss black reveal plates. White or silver decorative end plates (order separately).

Painted surfaces – 6 stage pretreatment and electrostatically applied thermoset powdercoat for stable, long lasting finish.

Reflector – extruded high purity aluminum with clear anodized specular finish. All luminaire hardware – stainless steel.

Cross-baffle – injection molded high-impact polycarbonate with metalized semi-specular finish.

Mounting:

X mount – pendant stems, cables **ordered separately**.

Pendant stem – 11/16" O.D. aluminum, internally threaded. 5" dia. aluminum canopy.

Cable – 1/16" dia. 7x7 aircraft cable, field adjustable length. Crossbar with 1/4-20 stud and 5" dia. canopy.

S mount – mounting plate fastens flush to ceiling. Unit hinges on plate for hands-free access to wiring.

Electrical:

Use 90°C wire for supply connections and through wire.

X mount – electrical feed hanger mounts over recessed outlet box (by others) and **must be located at end of row**.

S mount – 7/8" (22mm) dia. knockouts at ends of mounting plate for conduit feed (by others).

Housing hinges down for access to ballast and wiring. Optional #12 AWG prewired modular through wiring with quick connectors.

Integral electronic HPF thermally protected class P ballast with end-of-life protection.

Optional integral emergency battery operates one lamp. Separate unswitched supply is required.

Standard:


UL listed or CSA certified.

Features

- Exceeds IESNA recommended light levels with SINGLE T5 lamp – complies with ASHRAE/IESNA Energy Standards
- Precise extruded aluminum reflector drives light to bottom shelves – optimized for tall, narrow aisles
- Innovative variable width cross-baffle – redirects spill light
- Electronic programmed start ballast – battery pack optional

Performance

Multiple reflector segments drive light to the lowest shelves. Unique cross-baffle redirects a portion of the lamp energy that otherwise goes directly to the floor back into the main beam while providing lengthwise shielding. The result is high beam efficiency and superior surface uniformity in tall, narrow aisles.

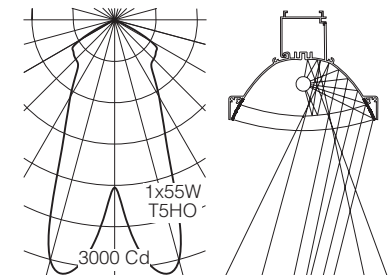

For complete photometrics, visit thelightingquotient.com



Cradle to Cradle Certified™ is a certification mark licensed by the Cradle to Cradle Products Innovation Institute.

elliptipar®
there is no equal™



