





**E Mount** 1:8 Scale

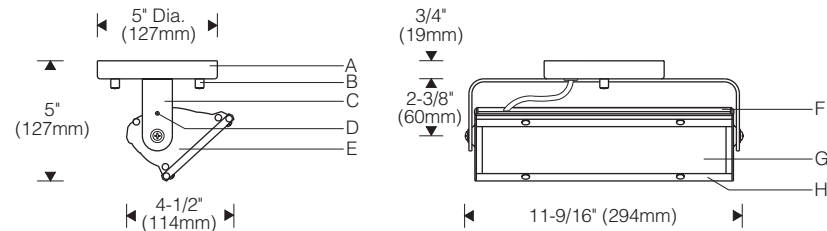

**Canopy**



**Specifications**


- |                          |  |   |  |
|--------------------------|--|---|--|
| <b>A</b> Aluminum canopy | <b>D</b> Locking set screw             | <b>F</b> Specular extruded aluminum reflector | <b>H</b> Overlapping aluminum door frame |
| <b>B</b> Chrome cap nuts | <b>E</b> Contoured aluminum end plates | <b>G</b> Micro-prismatic tempered glass lens  | <b>J</b> Pivoting hanger bar             |
| <b>C</b> Aluminum yoke   |  |   | <b>K</b> Recessed outlet box (by others) |

**Features**

- **KO Series** - high performance wall lighting for cost conscious projects
- Compact yet powerful - up to 250W halogen, 150W MH
- Extruded reflector - will not deform during maintenance
- Non-corrosive construction - aluminum and stainless steel
- No light leaks - overlapping door; sealed end plates

**Performance**

Two parabolic reflector sections drive light to the bottom of the wall. An elliptical section shields the lamp from normal viewing angles and redirects its light to a parabola. Glare is minimized and asymmetry of the beam is maximized resulting in high beam efficiency and superior surface uniformity.



**Finish:**

Bright clear anodized aluminum reflector with semi-gloss black door frame, end plates, yoke and canopy or all parts semi-gloss white.

Painted surfaces - 6 stage pretreatment and electrostatically applied thermoset powder coat for stable, long lasting and corrosion resistant finish.

Reflector - extruded high purity aluminum with clear anodized specular finish. All luminaire hardware - stainless steel. All mounting hardware - zinc or cadmium plated.

**Mounting:**

Canopy mounts over recessed outlet box.

Pendant or cantilever mounting assembly ordered separately; specify **X** mount.

**Electrical:**

Use 90°C wire for supply connections.

Tungsten halogen - DC bayonet lampholder retained with patented clamping supports for maximum heat dissipation.

Metal halide - G12 lampholder for use with single ended lamp. Remote encapsulated high reactance autotransformer ballast (35W and 70W) or electronic ballast. Electronic ballast provides improved voltage regulation, energy savings and automatic shut-off feature to eliminate end-of-life lamp cycling.

For complete ballast specifications, see Accessories Section.

**Standard:**

UL listed or CSA certified for damp locations. (Style 102 painted model with gasketed lens recommended for damp locations.) Where pendant or cantilever may be exposed to wind, consult factory.



For complete photometrics, see [www.elliptipar.com](http://www.elliptipar.com).

