



E Mount: 1:8 Scale

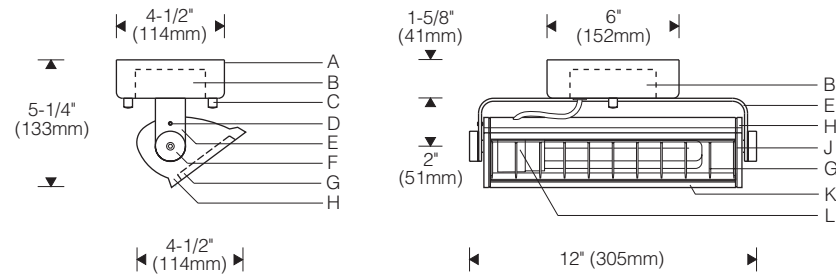

Canopy



Specifications

- | | | | |
|---|---|---|--|
| A Deep-drawn aluminum canopy | D Locking set screw | H Die-cast aluminum end plates | L Twist and lock lampholder |
| B Integral electronic ballast (remote for X mount pendant or cantilever) | E Aluminum yoke | J Aluminum reveal plates (black) | M Recessed outlet box (by others) |
| C Chrome cap nuts | F Aluminum knobs | K Specular extruded aluminum reflector | N Mounting plate |
| | G Snap-in polycarbonate cross baffle (matte gray), 15° shielding | | |

Finish:

Style 121 fluted - bright clear anodized aluminum housing. Painted end plates, yoke and canopy in choice of silver or semi-gloss black.

Style 122 smooth - semi-gloss white housing, end plates, yoke and canopy.

Painted surfaces - 6 stage pretreatment and electrostatically applied thermoset powder coat for stable, long lasting and corrosion resistant finish.

Reflector - extruded high purity aluminum with clear anodized specular finish. All luminaire hardware - stainless steel. All mounting hardware - zinc or cadmium plated.

Mounting:

Canopy mounts over recessed outlet box.

Pendant or cantilever mounting assembly ordered separately; specify X mount. Supplied with remote ballast. For pendant or cantilever with integral ballast, see Styles 105/106.

Electrical:

Use 90°C wire for supply connections.

Integral HPF thermally protected electronic ballast with end-of-life protection for use with 4-pin lamp. Twist and lock lampholder allows for easy lamp installation and removal.

X mount units (for use with pendant or cantilever) furnished with remote HPF thermally protected electronic ballast. Aluminum ballast enclosure includes four 7/8" diameter entries and a knockout for an accessory fuse. **Maximum wire length between electronic ballast and fixture is 8' (2.4m) less length of pendant stem or cantilever arm.**

Optional electronic dimming ballast (E mount only); compatible dimmer switch required (by others). Consult sales representative for compatibility and specifications. **Dimming not available with X mount pendant or cantilever.**

For complete ballast specifications, see Accessories Section.

Standard:


UL listed and CSA certified for damp locations. (Style 114 hex tube model with gasketed lens recommended for damp locations.)

Features

- Effective wall lighting - illumination from our one lamp wall washer is equivalent to others' two lamp units
- Snap-in matte gray baffle - 15° lengthwise shielding
- Integral electronic ballast - ideal incandescent substitute
- Die-cast end plates join at articulated reveals, machined aluminum knobs - no exposed fasteners

Performance

Two parabolic reflector sections drive light to the bottom of the wall. An elliptical section shields the lamp from normal viewing angles and redirects its light to a parabola. Glare is minimized and asymmetry of the beam is maximized resulting in high beam efficiency and superior surface uniformity.



For complete photometrics, see www.elliptipar.com.



