





S Mount 1:8 Scale

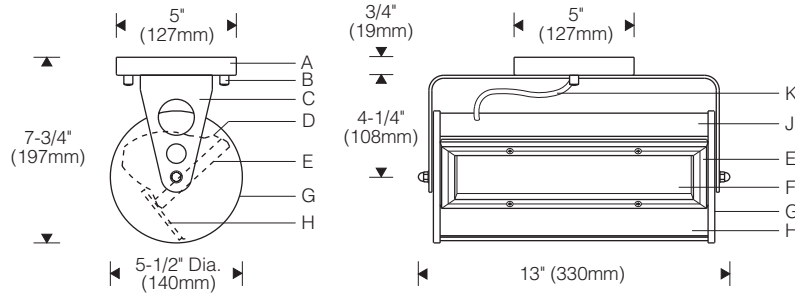

Mounting Plate



Specifications

- | | | | |
|---|---|---|--|
| A Aluminum canopy | E Mitred extruded aluminum door frame with silicone gasket | G Spun aluminum end plates | K Braided stainless steel cable sleeving (bright) |
| B Chrome cap nuts | F Micro-prismatic tempered glass lens | H Aluminum splay (white) | L Mounting plate |
| C Aluminum yoke | | J Perforated rolled aluminum housing | M Recessed outlet box (by others) |
| D Specular extruded aluminum reflector | | | |

Features

- Distinctive perforated housing in bright clear anodize with styled brushed aluminum yoke
- Round end plates – consistent profile regardless of aiming
- Precured silicone gaskets – keep dirt and moisture out
- Compact yet powerful – up to 250W halogen, 150W ceramic metal halide



Finish:

Perforated rolled aluminum housing. Bright clear anodized aluminum housing and end plates with brushed aluminum yoke and canopy. Black door frame and internal end plates. Painted surfaces – 6 stage pretreatment and electrostatically applied thermoset powder coat for stable, long lasting and corrosion resistant finish.

Reflector – extruded high purity aluminum with clear anodized specular finish. All luminaire hardware – stainless steel. All mounting hardware – zinc or cadmium plated.

Mounting:

Canopy and mounting plate fasten over recessed outlet box.

Electrical:

Use 90°C wire for supply connections. Tungsten halogen – recessed single contact (RSC) or DC bayonet lampholders retained with patented clamping supports for maximum heat dissipation.

Metal halide – G12 lampholder for use with single ended lamp. Remote encapsulated high reactance autotransformer ballast (35W and 70W) or electronic ballast. Electronic ballast provides improved voltage regulation, energy savings and automatic shut-off feature to eliminate end-of-life lamp cycling.


For complete ballast specifications, see Accessories Section.

Standard:

UL listed or CSA certified for damp locations (Style 120 painted model recommended for damp locations).

Performance

Two parabolic reflector sections drive light to the bottom of the wall. An elliptical section shields the lamp from normal viewing angles and redirects its light to a parabola. Glare is minimized and asymmetry of the beam is maximized resulting in high beam efficiency and superior surface uniformity.



For complete photometrics, visit thelightingquotient.com

To form a Catalog Number

- - - -

1 **2** **3** **4** **5** **6** **7** **8**



1 Source

M = Metal halide
T = Tungsten halogen

2 Style

133 = Small ... the dotted line cylinder, remote ballast

3 Lamp

Lamp Code	Wattage	Lamp Number	Voltages	Remote Distance
Ceramic Arc Tube Pulse Start Metal Halide (80+ CRI)* 				
035G	35	CDM35/T6/830	1, 2	15' (4.5m)
			A, B	10' (3m)
070G	70	CDM70/T6/830	1, 2	15' (4.5m)
			A, B	20' (6m)
150G	150	CDM150/T6/830	1, 2	5' (1.5m)
Tungsten Halogen 				
0100	100	Q100DC	A	
0150	150	Q150DC	A	
0200	200	Q200T3	A	
0250	250	Q250DC	A	

For complete lamp and ballast information, see Accessories Section.
* Standard lamp color is 3000K/80+ CRI.

4 Mounting

S = External symmetric yoke on canopy

5 Finish

P1 = Bright clear anodized perforated (non-illuminated) aluminum housing and end plates with brushed aluminum yoke and canopy; door frame and internal end plates finished black

Project: _____

Type: _____

6 Voltage/Ballast

Electronic Magnetic*
 1 = 120V A = 120V
 2 = 277V B = 277V
 *35W or 70W Metal Halide or Tungsten Halogen (120V)

7 Option (see Accessories Section for specifications)

00 = No options
 0H = Long distance remote ballast (encapsulated magnetic ballast for 35 and 70W only),
 35W: 15' minimum up to 50' maximum (4.5m - 15m),
 70W: up to 50' maximum (15m)
 0M = MRI medical facility use (halogen E mount only)
 0R = Halogen standby lamp with relay field connected at remote ballast. Lamp included (wattage varies).
 XX = For modification not listed, include detailed description. Consult factory prior to specification.

8 Destination Requirement

0 = UL listed or CSA certified for U.S.
 J = UL listed or CSA certified for Canada

Example

T133 - 0250 - S - P1 - A - 000

Small ...the dotted line cylinder for use with 250W tungsten halogen lamp. Mounted with external symmetric yoke on canopy. Bright clear anodized perforated aluminum housing and end plates with brushed aluminum yoke and canopy; black door frame. 120V. UL listed or CSA certified for U.S.

Accessories

Order separately. See Accessories Section for specifications.

AFK000X = Ballast fuse kit
 0 = U.S.
 J = Canada

