






Style S305

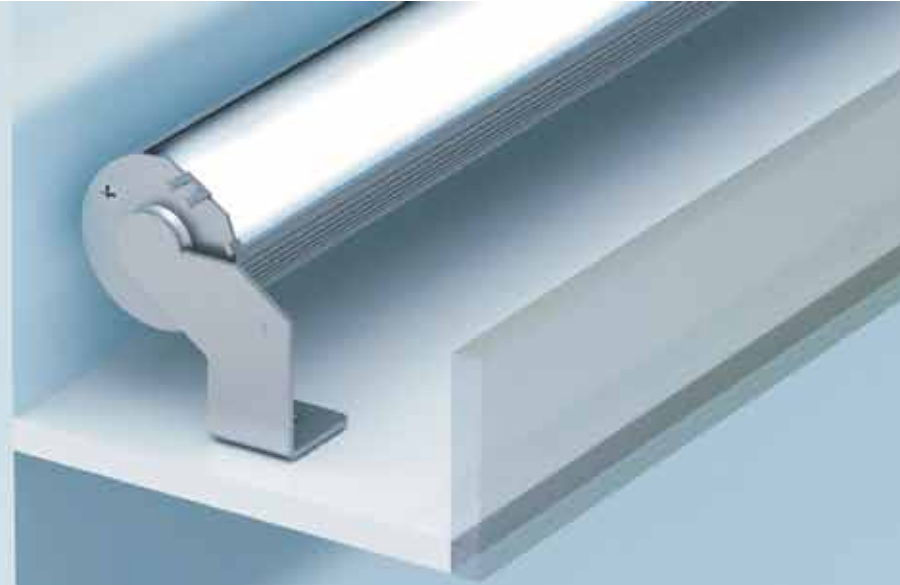

Style S301

fraqtir™ LED for cove applications

fracqtir™ LED for cove applications

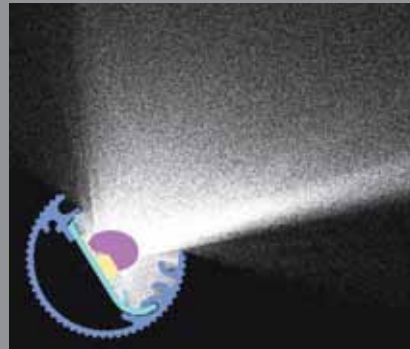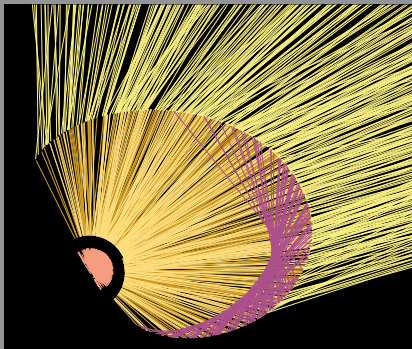


- Innovative linear refractor uses principles of refraction and total internal reflection.
- Produces an asymmetric distribution ideal for illuminating surfaces uniformly from one edge.
- Light output —300 lumens per foot standard (45.3 Lm/W) or 500 lumens per foot high output (33.6 Lm/W).



- Precise optical control ensures virtually all of the light gets out of the cove and is delivered to the target surface.
- ITL LM-79-08 and Spectroradiometric test reports available (see Website).
- Powered by the most advanced LUXEON Rebels from Philips Lumileds, the LEDs produce a consistent warm white light with great color rendering.

- LED light engine assemblies are removable for service and upgrade.
- Extruded aluminum heat sink allows optimal thermal performance in cove and ceiling slots.
- Optional dimming drivers available. Consult Factory for more information.
- Snap in cover lens protects circuit board and allows for easy cleaning.

- Rotation stop prevents the optic from being improperly aimed.
- Available with remote driver (style S301) or integral driver (style S305).
- Patented interlocking and aiming details allow continuous rows to be aimed as one and permanently locked.
- Adjustable mounting feet provide three aiming orientations.

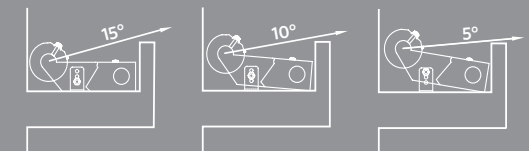

elliptipar® 

There is no equal™

tambient® 

Green in any color®

fracqtir™ 

The Lighting Quotient

114 Boston Post Road, West Haven, CT 06516

Tel 203.931.4455 Fax 203.931.4464

www.TheLightingQuotient.com



THE LIGHTING QUOTIENT™