

Features


- Symmetrical two-way task lighting from a single T5 lamp
- For mounting at 19-1/2" over dual-workstations and reading tables
- Anti-glare "batwing" task lens reduces eyestrain
- Integrates with embedded wireless controls (consult factory)



Performance

Illuminance levels for standard lamp height position for P204 shown. Ballast factor 0.98, input watts 34.

For complete photometrics, see thelightingquotient.com.

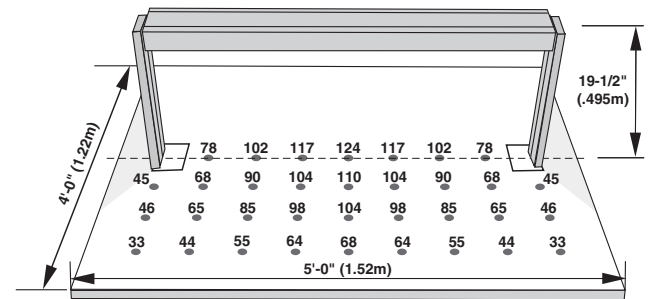

Specifications

Finish:

Painted housing, fillers, decorative end plates, and mounting accessories (end mount rails, stanchions).

Painted surfaces – environmentally friendly 6-stage pretreatment and electrostatically applied thermoset powder coat provides a long lasting, scratch resistant finish. Choice of standard colors. RAL and computer matched colors available on request.

Reflector – extruded aluminum, chemically brightened and clear anodized.

Mounting:

P204 dual-workstation luminaires are used for freestanding office furniture or shared workspaces, and can be mounted to a furniture panel with end mount rails, or to bridge stanchions.

L204 has a smooth back surface; L204 cords exit from the bottom right, rotate unit to provide a left-hand exit. Stanchions feature a cord management slot.

One mid-mount optical configuration accommodates 36" and 48" work surfaces and recommended mounting heights between 48" and 53". To avoid discomfort glare, do not install units below 48" or above 53" (50" for 36"-deep work surfaces).

Electrical:

Integral electronic ballast is HPF thermally protected class P, 120 volt. BF > 0.98. Programmed start maximizes lamp life and minimizes energy use.

Cord – 9' 18-3 SJT, molded NEMA 5-15 grounded plug, factory installed. Chicago Code cord with integral circuit breaker available. Low profile grounded plug with 45° rotation is standard. Black is standard; gray cords are available at additional cost.


Standard output T5 lamps are included. Choose from 3000K, 3500K and 4100K lamps.

Standard:

UL listed or CSA certified.

Sample number: P204-60S5-M-EL15-1-4E-00-35 Project: _____

Type: _____



Style

P204 Dual-workstation T5 task luminaire. Each luminaire provided with one or two (tandem) T5 fluorescent lamps depending on length of unit.

Length/Lamps

Code	Length (mm)	Lamp(s)	Input
48S4	47-1/2" (1205)	1xF28T5	33W
60S5	59" (1500)	1xF35T5	41W
71S6	70-3/4" (1800)	2xF21T5	49W
83S7	82-1/2" (2095)	1xF21T5 + 1xF28T5	60W
95S8	94-1/4" (2395)	2xF28T5	66W

Other lengths and lamping are available; consult factory.

Optic

M Mid-mount. Recommended mounting height is 48" to 50" for 36"-wide shared work surfaces and 50" to 53" for 48"-wide shared work surfaces. When a standard (19") bridge stanchion is used, the top of the luminaire is at 48" A.F.F. For IES information, consult factory.

Finish

- EL02** Eggshell white
 - EL06** Dark bronze
 - EL07** Silver
 - EL08** Semi-gloss black
 - EL12** British racing green
 - EL15** Warm metallic
 - TASL** Semi-gloss slate
 - XXXX** Custom color (specify or submit sample)
- or 4-digit RAL color code (color chart available)

Electrical

120 V only

- 1** Electronic ballast

Cord

90° SW rotation plug, 9 feet:

- 1** Black
- 3** Gray
- 7** Chicago cord, integral circuit breaker, black

Straight plug, 9 feet (L202 only):

- 2** Black
- 4** Gray
- 8** Chicago cord, integral circuit breaker, black

Cord Exit

- E** Bottom right (luminaire can be rotated for left-hand exit)


Options

- 00** None
- 0S** On/off switch
- XX** Custom modification (specify)


Lamp Color

- 30** 3000K, 85 CRI
- 35** 3500K, 85 CRI
- 41** 4100K, 85 CRI

Mounting Accessories

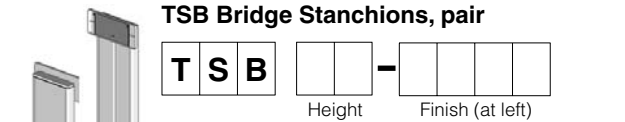

TSB Bridge Stanchions, pair
TSB19- Standard use (TSB19-) places the top of the luminaire 19-1/2" above the work surface. Pair, features integral cord management slot, removable base plates, concealed interface plates, and decorative end plates. Each individual stanchion and end plate assembly adds 1-3/4" to the luminaire length.

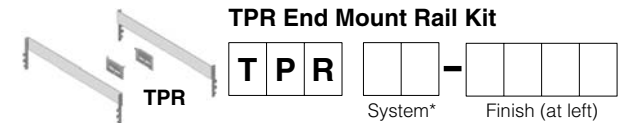

TPR End Mount Rails (for 24" wide end panels) mount to slotted panel frames. Several models are available to interface with a variety of panel systems. Pair of rails, includes pair of black interface plates.

**For compatible furniture systems, see website.*

TPE End Mount Brackets, pair

Support the ends of the luminaire, black, pair.



P204 installed with TSB bridge stanchions

