

Style F308 in coves

Style F124



Architect: Robert A. M. Stern Architects with Wallis Murphey Boyington Architects
Engineer: Pyramid Engineering
Photography: Dana Hoff

Entry Lobby:

Plan: 40' to 54' wide x 22' to 27' deep
Heights: Wallwashers at 18'; coves at 26'; interior ceiling = 32' to 33' a.f.f.
Lighting: (6) F124-D280-H-02-1-00-0 (5' long) and (4) F124-D255-H-02-1-00-0 (4' long) wallwashers with HCC/HCD02240 cantilevers;
(16) F308-T155-S-00-1-00-0 (4' long) dual-reflector cove lights
Estimated illuminances: 59 fcai on interior ceiling; 57 fcai on side walls; 20 fcai on floor
Estimated power density: 1.39 W/sf per floor (2 levels)


elliptipar Styles F308, F124

The new Christoverson Humanities Building is intended both as a meeting place and a welcoming entrance to the Florida Southern College campus. Common areas include a front lawn, a loggia overlooking a lake, a piano nobile, and a student lounge. A dramatic high overhang above the loggia leads the eye into the two story glass walled piano nobile. The building also houses four classrooms, a seminar room, twenty faculty offices, and four laboratories devoted to film, languages, writing and computers.

elliptipar Style F308 T5 linear fluorescent cove lights were placed around the perimeter of the piano nobile, just under the upper windows, to wash light onto the white ceiling. Cantilevered **Style F124s** are mounted just below the lower window ledges to the right and left of the front glass wall, to wash light down warm-toned feature walls. The **F308** and **F124** are both Cradle to Cradle Certified^{CM}, recognized for their component materials' environmental safety and reusability.



Cradle to Cradle Certified^{CM} is a certification mark licensed by the Cradle to Cradle Products Innovation Institute.

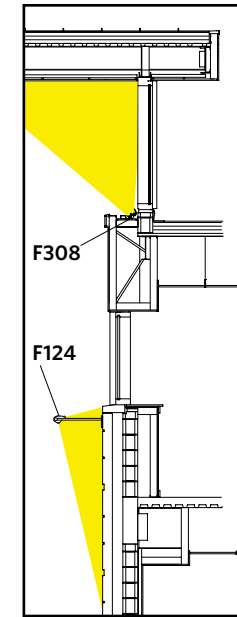

Concealed **F308** cove lights and cantilevered **F124** wallwashers blend discretely with the interior design.



Each reflector in the Style **F308** can be joined, aimed and locked independently.

Cantilevered **F124** wall washers for the side feature walls are through-wired, requiring only a single electrical feed for each row.

U. S. Patent Nos. D468,457; 5,550,725; 7,213,949 and Foreign