

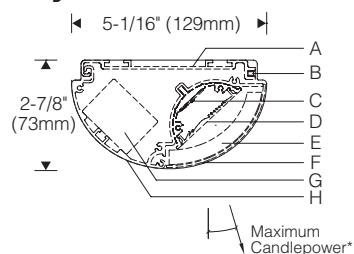



Style S143 1:5 Scale

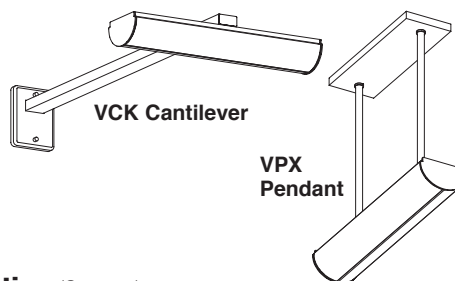


Accessories (X Mount)

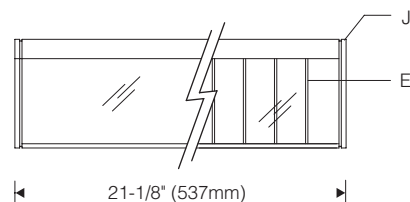

Top View (S Mount) 1:5 Scale

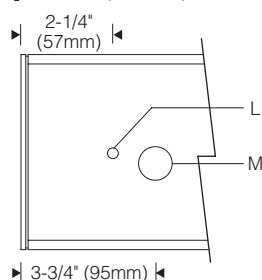

Top View (C Mount) 1:5 Scale



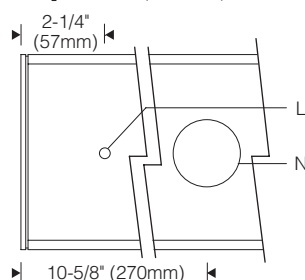


Installation (S mount)

Secure mounting plate to ceiling, fasteners by others

Hang housing, connect supply wiring

Hinge closed, secure with screws



Specifications

- | | | | |
|---|---|---|---|
| A Extruded aluminum mounting plate | D Extruded acrylic beam shaping lens | G High power factor constant current electronic driver | L Mounting hole 9/32" (7mm) diameter |
| B Closure screws | E Optional cross baffle (gray) | H Extruded aluminum housing | M Knockout 7/8" (22mm) diameter |
| C Serviceable light engine | F Extruded acrylic hinging lens | J Aluminum decorative end plates, included | N Access hole to j-box |

Finish:

Painted surfaces – 6 stage pretreatment and electrostatically applied thermoset powder coat for stable, long lasting and corrosion resistant finish. Extruded aluminum mounting plate and housing, formed aluminum end plates. All luminaire hardware – stainless steel.

Optic Assembly:

Light engine – extruded aluminum heat sink with linear array of high power LEDs. Light engines are removable for replacement or upgrade. Precision extruded optical lens of high temperature, water-clear acrylic. Elliptical distribution holographic diffuser maximizes lateral distribution without disturbing asymmetric distribution.

Mounting:

C mount – mounting plate fastens flush to ceiling over recessed outlet box. Unit hinges open for hands-free wiring.

S mount – mounting plate fastens flush to ceiling for direct conduit feed. Unit hinges open for hands-free wiring.

X mount – cantilever arm or pendant stems **ordered separately**.

Pendant stems – 11/16" O.D. aluminum, 5" x 15" ceiling canopy.

Cantilever arm – 2"W x 1"H steel arm, 4.5" x 6" wall canopy.

Fixture weight: 6.0 lb (2.7 kg).

Electrical:

Use 90°C wire for supply connections. Integral electronic HPF thermally protected Class 2 driver. For complete driver specifications, see website, reference document [MA-1303](#). Driver/wireway compartment includes one conduit entry at each end. Channel cover is removable for access to driver and wiring. Luminaires may be butted end-to-end (connectors by others) for through wiring. Optional, compatible dimming controls (by others). See website for dimming compatibility and specifications.

Standard:

UL listed or CSA certified for dry location.

For damp locations, specify **DL** or **DB** option.

5 year warranty, maximum ambient temperature 45°C (113°F).


Features

- Inconspicuous low profile – lights entire wall evenly without emphasizing surface imperfections (unlike slot grazers)
- Compact size with integral driver
- Asymmetric distribution — evenly lights vertical surfaces
- Light engines serviceable for replacement or future upgrade

Performance

Precisely extruded acrylic lens produces an asymmetric distribution ideal for illuminating vertical surfaces evenly from top to bottom.

For LM79 and photometric reports, visit thelightingquotient.com

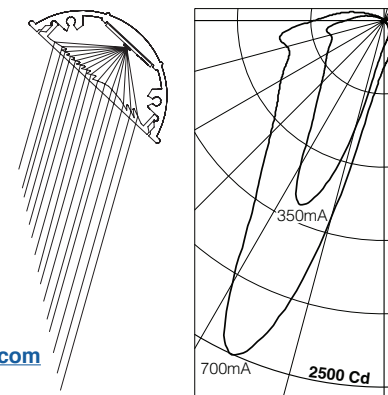

L90(10k) > 60,000 hrs. @ 25°C per TM-21



To form a Catalog Number

S **1 4 3** - - - - - - - - - -

1 2 3 4 5 6 7 8 9 10

Project: _____

Type: _____

1 Style

S143 = Small enclosed semi-elliptical LED 8" long point source with integral driver

2 Output / Power

S = Standard output
H = High output

3 Length

22 = 22 inch nominal length (S=24W, H=48W)

See [Scaled Performance Table](#)

4 Mounting

C = Ceiling mount over recessed outlet box
S = Ceiling mount for direct conduit feed
X = For use with cantilever or pendant stem — required hangers ordered and priced separately

5 Finish

02 = Semigloss white **13** = Matte Black **22** = Matte White
06 = Dark bronze* **15** = Metallic **PL** = Platinum
07 = Silver* **17** = Champagne* **99** = Custom or RAL, consult rep.*
08 = Semigloss black **18** = Copper*

02	22*	PL*	07*	15*
08	13*	06*	18*	17*

* = non-cancellable/returnable

6 Voltage

M = 120-277V Universal voltage input
K = 347V input (remote driver only)

7 Option (See Accessories Section for specifications)

L0 = Clear lens (included in fixture)
DL = Clear lens with gaskets for damp location
LB = Clear lens and baffle
DB = Clear lens and baffle for damp location
LM = For use in MRI medical facility (drivers remote mounted). MRI filters required on output of each remote driver, ordered and priced separately. Consult factory prior to specification.

8 Destination Requirement

0 = UL listed or CSA certified for U.S.
J = UL listed or CSA certified for Canada

9 Color Temperature / CRI

927 = 2700K, 90+ CRI **TWH** = Tunable White
930 = 3000K, 90+ CRI 2700K-6500K 90+CRI
935 = 3500K, 90+ CRI **RGB** = Color tunable
940 = 4000K, 90+ CRI RGBW with 3500K, 90+ CRI white



Note: Additional CCT and CRI options are available; consult factory.

10 Dimming

00 = Non-dimming
ZX = 0-10V analog dimming 120-277V or 347V input, dimming 100%-1%, 0-10V controls by others
EL = 0-10V eldoLED SOLOdrive, 120-277V input, dimming 100%-0.1%, 0-10V controls by others
ED = DALI eldoLED SOLOdrive, 120-277V input, dimming 100%-0.1%, DALI controls by others
TD = ERP forward or reverse phase 120V only, dimming 100%-6%, 120V phase controls by others
DZ = TWH 2-Channel driver for use with (2) 0-10V controls by others
DD = TWH 2-Channel DALI driver (DALI controls by others)
DA = RGBW 4-Channel DMX module (DMX controls by others)
DM = RGBW 4-Channel eldoLED LINEARdrive (DMX controls by others)

Required Mounting Hangers (X mount)

Required mounting hangers for **X** mount fixtures are ordered and priced separately. See installation sheets on website. Order one hanger for each **X** mount luminaire. **VCK or VPX hangers are required for X mount S143.**

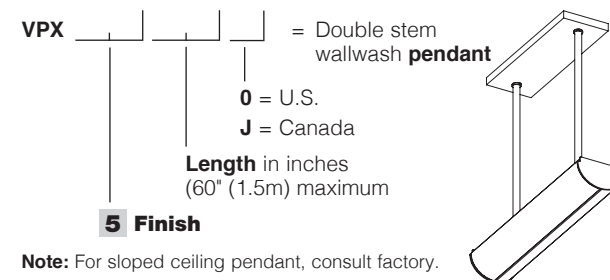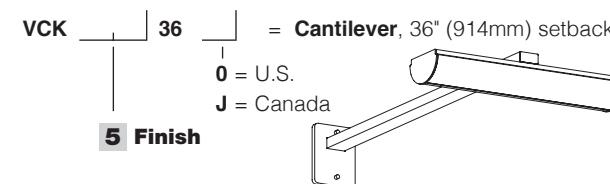

Note: For sloped ceiling pendant, consult factory.

Controls

AWB-TP-DMX-0 = RGBW LED dimmer switch fits in a standard wall switch box and provides on/off control as well as fixed levels of dimmability. The dimmer switch has a color-selection wheel for thousands of color options, 10 dynamic color-changing/single color modes, 0-100% dimming, on/off controls, and 4 color-specific channel controls for red, green, blue, and white.

Additional Wired and wireless controls available, see [Driver and Controls Information](#)



elliptipar from **The Lighting Quotient**
 114 Boston Post Road, West Haven, Connecticut 06516, USA
 Voice 203.931.4455 • Fax 203.931.4464 • thelightingquotient.com

Certain products illustrated may be covered by applicable patents and patents pending. These specifications supersede all prior publications and are subject to change without notice. Copyright © 2021 Sylvan R. Shemitz Designs, LLC, all rights reserved.