S43X elliptipar® high-lumen Ensconce® uplights

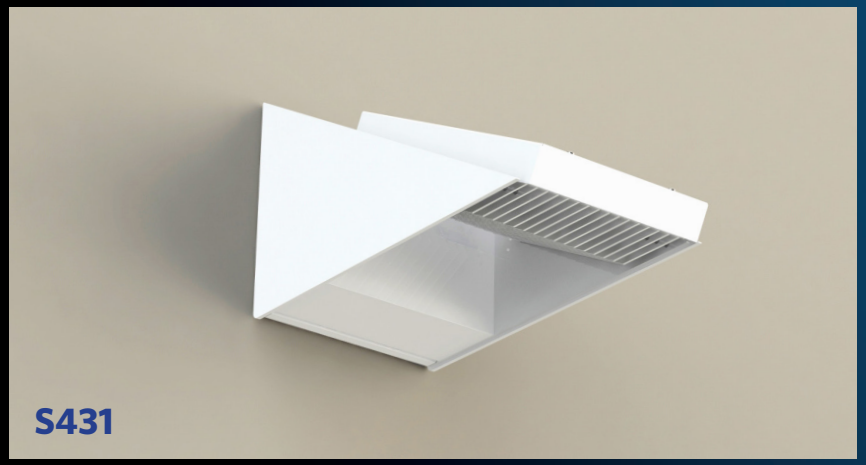

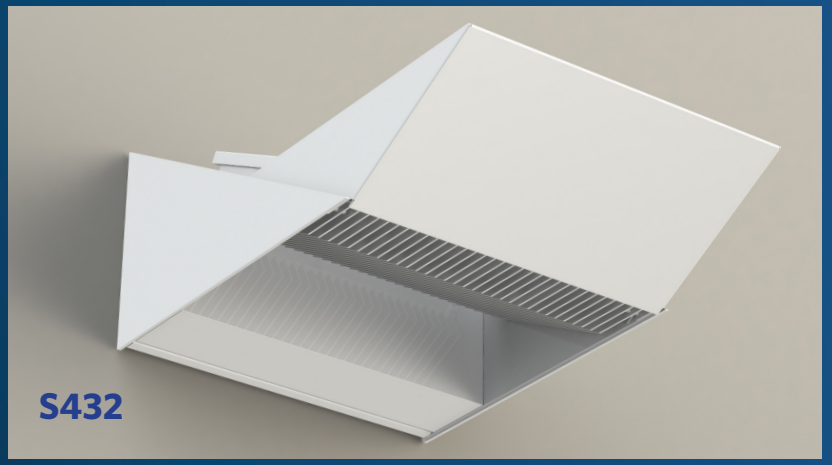

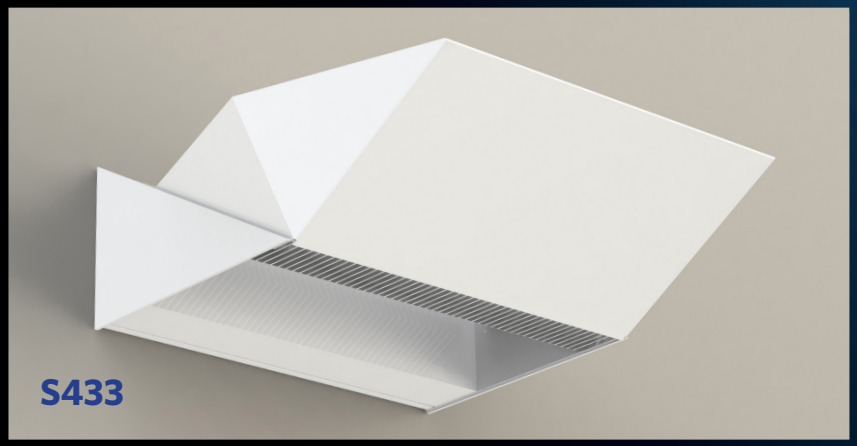

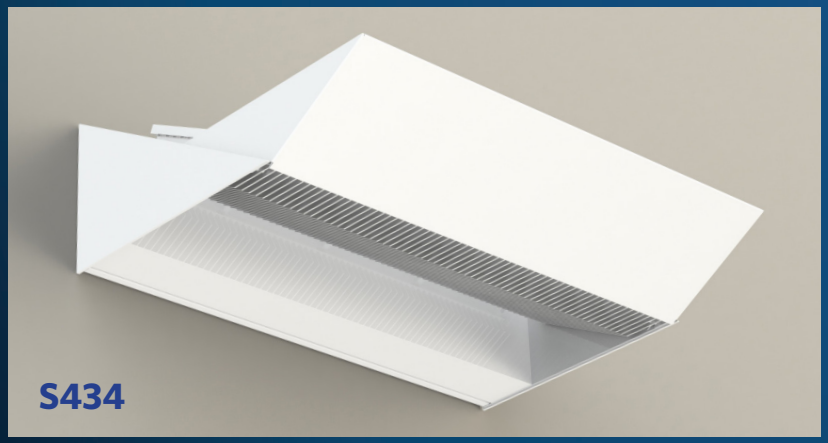

2017 IES PROGRESS Report SELECTION

THE LIGHTING QUOTIENT elliptipar tambient 100 YEARS 1920–2020 SOLVING FOR LIGHT

THE LIGHTING QUOTIENT elliptipar tambient 49 YEARS 1971–2017 MANUFACTURING FOR LIGHT

SOLVING FOR LIGHT

elliptipar®
tambient®

THE LIGHTING **QUOTIENT**®

www.TheLightingQuotient.com

PRODUCT

S43X

elliptipar® high-lumen Ensconce® uplights

your 4-digit Quickfinder code at www.TheLightingQuotient.com

elliptipar... there is no equal



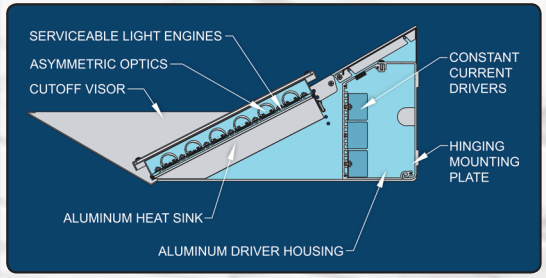

STYLE	S431	S432	S433	S434
# of LEDs	108	216	324	432
Input Watts	172W	337W	503W	669W
Delivered Lumens	14,427	27,877	40,365	51,821
Metal Halide Equivalent	250W	400W	2X400W	1000W

*Delivered lumens are based on fixture with visor and 4000K/70+CRI LEDs
**Based on maintained metal halide delivered lumens

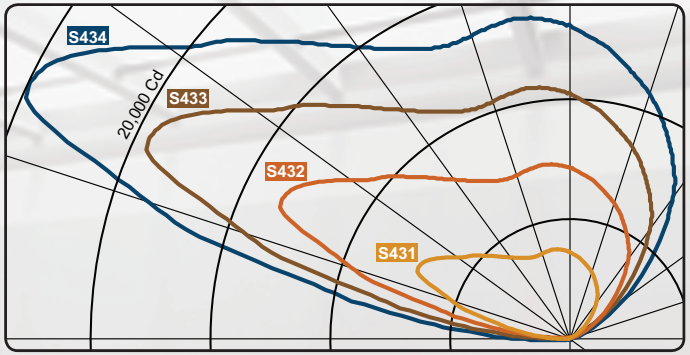

- **New high-lumen Ensconce®** architectural asymmetric uplight by **elliptipar®** in 4 sizes
- **Choice of two visor styles** or use with custom designed shroud tailored to the application
- **Wall mounting or pendant mounting** in 1-way or back-to-back configurations
- **Precision optics** create a distribution ideal for illuminating surfaces evenly from edge to edge
- **Adjustable aiming** with positive locking
- **CSP (chip scale package) LEDs** provide industry leading color uniformity
- **Multiple CCT/CRI choices** – 2780, 3080, 3580, 4080, 4070 (others available upon request)
- **Excellent lumen maintenance** L90(10k)>60,000 hrs @ 25°C per TM-21; maintains over 90% of initial light output beyond 60,000 hours
- **All aluminum and stainless steel construction**
- **Natatorium option** includes gasketed lens and sealed wire entries
- **High purity extruded aluminum heat sink** designed for optimal heat dissipation
- **Wall plate allows luminaire to hinge open** for hands-free access to drivers and wiring
- **Light engines and drivers are serviceable for replacement or future upgrade**
- **Programmable drivers** can be set to achieve a specific light output, wattage or LPD
- **Several dimming options** available down to 0.1% power (0-10V, DALI and more)
- **TM-30-15 color reports available online**
- **CSA certified for damp locations**

Certified WBENC Women's Business Enterprise | BUY AMERICAN | UNION MADE | LED lighting facts | LUMILEDS The Brighter Choice

© 2017 Sylvan R. Shemitz Designs, LLC

U.S. and Foreign Patents Pending

SOLVING FOR LIGHT

elliptipar®
tambient®

THE LIGHTING QUOTIENT®

114 Boston Post Road
West Haven, CT 06516
203.931.4455
203.931.4464

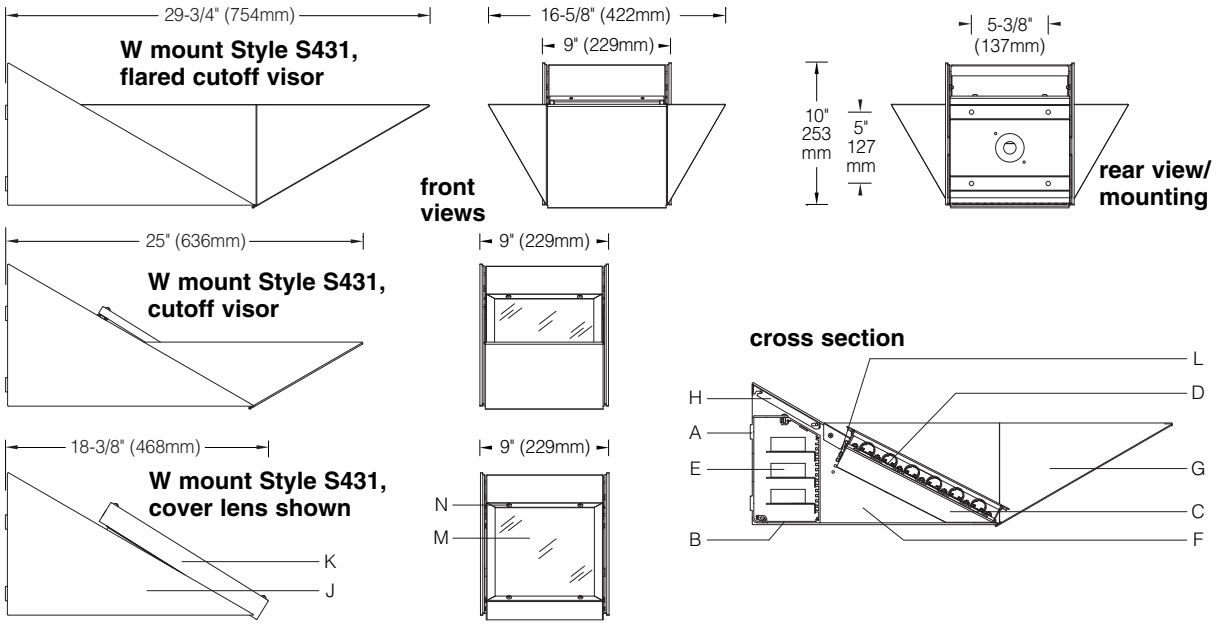

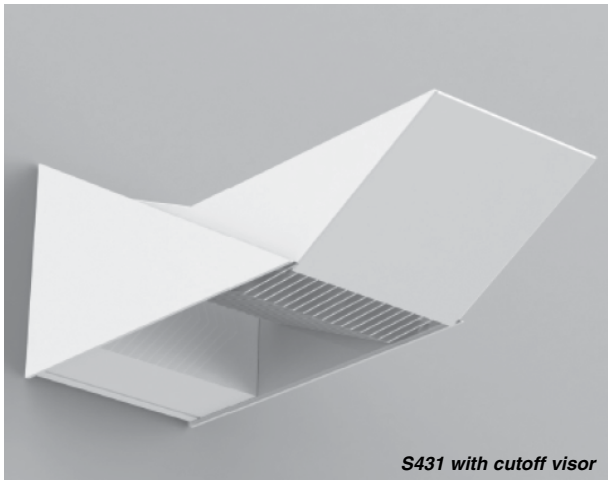
S431 with cutoff visor

Specifications

A Extruded aluminum mounting plate/driver cover

B Extruded aluminum driver housing

C Extruded aluminum heat sink/fixture head

D LED light engine

E Integral electronic driver

F Aluminum reveal plates

G Cutoff visor (flared shown)

H Decorative cover

J Aluminum sidearms

K Lens door

L Aiming latch

M Acrylic lens (**0P**, **VP**, **FP** options only)

N Door retaining screws

Housing and Optic Assembly:
Extruded aluminum heat sink/housing. Exterior heat sink anodized for maximum emissivity. Removable interior extrusion treated to maximize thermal conductivity. Precision extruded asymmetric optics of high temperature, water-clear polymer. Optional impact resistant exterior lens.

Finish:
Painted surfaces – 6 stage pretreatment and electrostatically applied thermoset polyester powder coating for a durable abrasion, fade and corrosion resistant finish. Formed aluminum visor. Extruded aluminum heat sink/housing, yoke, door frame, and decorative end plates are finished in semigloss white or specified custom color. All luminaire hardware is stainless steel.

Mounting:
Mounting plate covers recessed outlet box or conduit feed and forms reveal at wall. Suitable backing structure required (by others) – weight is approximately 21 lb/7.8 kg. Fixture hinges on plate for hands-free access to splices. Required upright pendant mounting assembly ordered and priced separately (see pg. SC22.1); specify mounting **1** or **2**.

Electrical:
Use 90°C wire for supply connections. Integral electronic HPF constant current drivers. For complete driver specifications, see website, reference document **MA-1303**.

Standard:
UL listed or CSA certified for dry locations (optional damp location rating – specify pool option **0P**, **VP** or **FP**). 5 year warranty, maximum ambient temperature 40°C (104°F).

Features

- *Adjustable aiming for fine tuning of ceiling uniformity*
- *All aluminum and stainless steel construction*
- *Natatorium option for harsh indoor pool environments*
- *Universal voltage drivers with programmable drive current*
- *Light engines are serviceable for replacement or upgrade*

SC 22.0

Performance

Precisely extruded polymer optics produce an asymmetric distribution ideal for illuminating ceilings evenly from one edge.

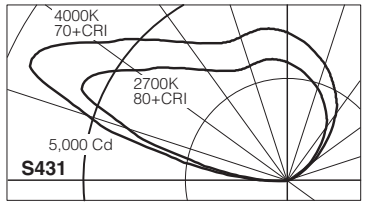

L90(10k) > 60,000 hrs @ 25°C per TM-21

For photometric and lumen maintenance reports, visit ***thelightingquotient.com***



LED lighting facts LED Product Partner

2017 PROGRESS Report SELECTION

elliptipar® with LED

To form a Catalog Number

S 4 3 1 - [3] - [4] - [5] - [6] - [7] - [8] - [9] - [10]

1 2 3 4 5 6 7 8 9 10

Project: _____ Type: _____

1 Source

S = Solid state (LED)

2 Style

431 = Large surface Ensconce® with integral driver

3 Lumen/Wattage Options

LAMP CODE	INPUT WATTS	LUMENS	NUMBER OF LEDs	DRIVE CURRENT
5108	172W	12895	108 LEDs	500mA

Based on visor option with 4000K, 80+CRI LEDs.
Click here for scaled performance table.

4 Mounting

W = Wall mount over recessed outlet box, uplight only
S = Wall mount side surface conduit, uplight only
T = Wall mount top surface conduit, uplight only
1 = 1-way pendant uplight, one fixture — required mounting hanger ordered and priced separately
2 = 2-way pendant uplight, two fixtures — required mounting hanger ordered and priced separately

SC 22.1

5 Finish

02 = Semigloss white
99 = Custom RAL or computer matched color to be specified; consult sales representative

6 Voltage/Driver

Electronic Driver	*Electronic Dimming Driver*
8 = 120-277V	**M** = 120-277V
3 = 347V	**K** = 347V

7 Option (See Accessories Section for specifications)

00 = No options
0P = Natatorium (pool) use (includes acrylic lens)
V0 = Cutoff visor (5° shielding)
VP = Cutoff visor (5° shielding) for natatorium (pool) w/ lens
F0 = Flared cutoff visor (horizontal shielding)
FP = Flared cutoff visor (horizontal shielding) natatorium w/ lens
XX = For modification not listed; include detailed description. Consult factory prior to specification

8 Destination Requirement

0 = UL listed or CSA certified for U.S.
J = UL listed or CSA certified for Canada

9 Color Temperature

27 = 2700K, 80+ CRI
30 = 3000K, 80+ CRI
35 = 3500K, 80+ CRI
40 = 4000K, 80+ CRI
4L = 4000K, 70+ CRI

Note: Additional CCT and CRI options are available; consult factory.

10 Dimming*

00 = Non-dimming
ZX = 0-10V analog dimming 120-277V or 347V input, dimming range 100%-5%, 0-10V controls by others
EL = eldoLED SOLOdrive 120-277V input, 0-10V analog gamma corrected dimming 100%-0.1% power (controls by others)
ED = eldoLED SOLOdrive 120-277V input, dimming range 100%-0.1%, DALI controls by others

*Dimming range refers to % power input, % light output will vary.
Refer to Driver Information document MA-1303

Required Mounting Hangers

Required mounting hangers for pendant mount fixtures are ordered and priced separately. See installation sheets on website. ***VPQ required for pendant mounting options 1 or 2:***

VPQ [ ] [ ] [ ] [ ] [ ] [ ] = **Uplight pendant** 2" x 4" aluminum stem

- **0** = U.S.
- **J** = Canada
- **0** = No option
- **P** = Natatorium (pool)
- **F** = Surface conduit feed
- **Q** = Natatorium (pool) and surface conduit feed
- **C** = Canopy (leveling plate ±5°)
- **S** = Canopy with pivot up to 30°
- **Length** in inches (36" min. up to 120" max.)
- **02** = Semigloss white
- **99** = Custom finish
- **1** = One-way
- **2** = Two-way

Note: Suitable structure required to support up to 65 lb/25 kg. For additional pendant specifications, see **thelightingquotient.com**.



DOE Lighting Facts label for S431,
108 LEDs @ 500 mA, 4000K/80+CRI shown.

elliptipar® with LED
elliptipar *from* **The Lighting Quotient**
114 Boston Post Road, West Haven, Connecticut 06516, USA
Voice 203.931.4455 • Fax 203.931.4464 • **thelightingquotient.com**

Certain products illustrated may be covered by applicable patents and patents pending. These specifications supersede all prior publications and are subject to change without notice. Copyright © 2017 Sylvan R. Shemitz Designs, LLC, all rights reserved.

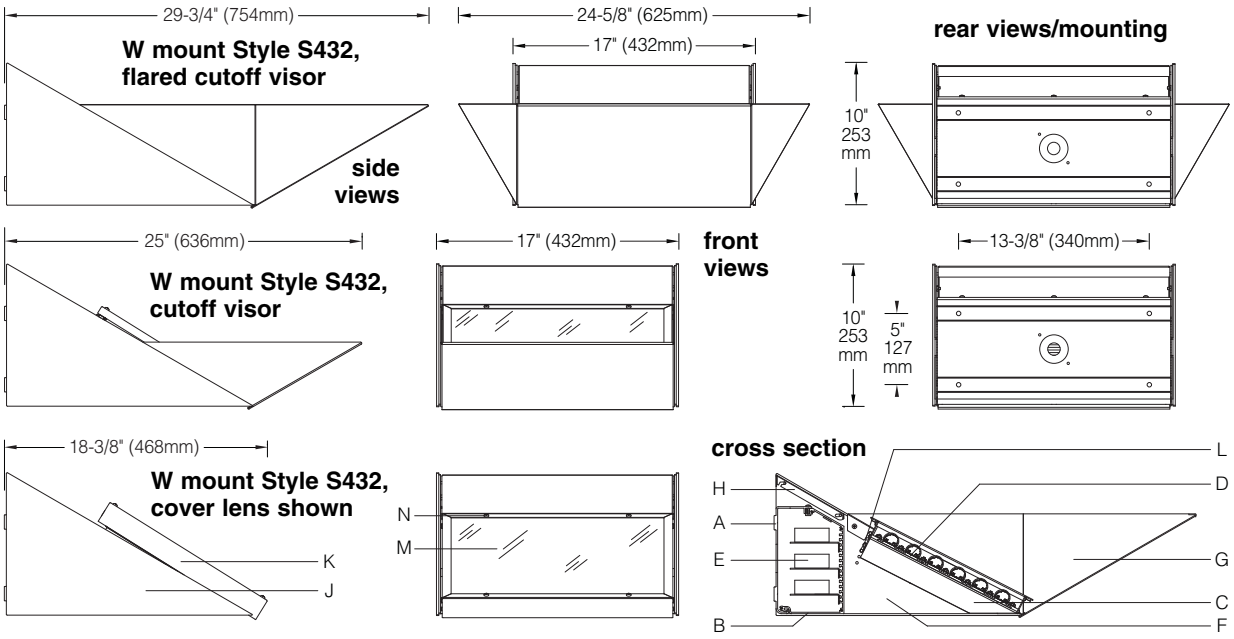

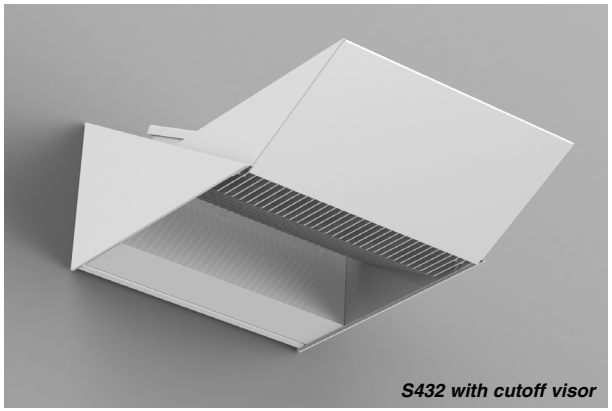
S432 with cutoff visor

Specifications

A Extruded aluminum mounting plate/driver cover

B Extruded aluminum driver housing

C Extruded aluminum heat sink/fixture head

D LED light engine

E Integral electronic driver

F Aluminum reveal plates

G Cutoff visor (flared shown)

H Decorative cover

J Aluminum sidearms

K Lens door

L Aiming latch

M Acrylic lens (**0P**, **VP**, **FP** options only)

N Door retaining screws

Housing and Optic Assembly:
Extruded aluminum heat sink/housing. Exterior heat sink anodized for maximum emissivity. Removable interior extrusion treated to maximize thermal conductivity. Precision extruded asymmetric optics of high temperature, water-clear polymer. Optional impact resistant exterior lens.

Finish:
Painted surfaces – 6 stage pretreatment and electrostatically applied thermoset polyester powder coating for a durable abrasion, fade and corrosion resistant finish. Formed aluminum visor. Extruded aluminum heat sink/housing, yoke, door frame, and decorative end plates are finished in semigloss white or specified custom color. All luminaire hardware is stainless steel.

Mounting:
Mounting plate covers recessed outlet box or conduit feed and forms reveal at wall. Suitable backing structure required (by others) – weight is approximately 33 lb/12.3 kg. Fixture hinges on plate for hands-free access to splices. Required upright pendant mounting assembly ordered and priced separately (see pg. SC23.1); specify mounting **1** or **2**.

Electrical:
Use 90°C wire for supply connections. Integral electronic HPF constant current driver. For complete driver specifications, see website, reference document **MA-1303**.

Standard:
UL listed or CSA certified for dry locations (optional damp location – specify pool option **0P**, **VP** or **FP**). 5 year warranty, maximum ambient temperature 40°C (104°F).

Features

- *Adjustable aiming for fine tuning of ceiling uniformity*
- *All aluminum and stainless steel construction*
- *Natatorium option for harsh indoor pool environments*
- *Universal voltage drivers with programmable drive current*
- *Light engines are serviceable for replacement or upgrade*

SC 23.0

Performance

Precisely extruded polymer optics produce an asymmetric distribution ideal for illuminating ceilings evenly from one edge.

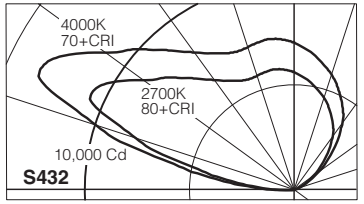

L90(10k) > 60,000 hrs @ 25°C per TM-21

For photometric and lumen maintenance reports, visit ***thelightingquotient.com***



LED lighting facts LED Product Partner

2017 PROGRESS Report SELECTION

elliptipar® with LED

To form a Catalog Number

Project: _____ Type: _____

S	4	3	2	-			-			-			-			-			-		
1			2			3		4		5	6		7	8		9			10		

1 Source

S = Solid state (LED)

2 Style

432 = Large surface Ensconce® with integral driver

3 Lumen/Wattage Options

LAMP CODE	INPUT WATTS	LUMENS	NUMBER OF LEDs	DRIVE CURRENT
5216	337W	24918	216 LEDs	500mA

Based on visor option with 4000K, 80+CRI LEDs.
Click here for scaled performance table.

4 Mounting

W = Wall mount over recessed outlet box, uplight only
S = Wall mount side surface conduit, uplight only
T = Wall mount top surface conduit, uplight only
1 = 1-way pendant uplight, one fixture — required mounting hanger ordered and priced separately
2 = 2-way pendant uplight, two fixtures — required mounting hanger ordered and priced separately

SC 23.1

5 Finish

02 = Semigloss white
99 = Custom RAL or computer matched color to be specified; consult sales representative

6 Voltage/Driver

Electronic Driver	*Electronic Dimming Driver*
8 = 120-277V	**M** = 120-277V
3 = 347V	**K** = 347V

7 Option (See Accessories Section for specifications)

00 = No options
0P = Natatorium (pool) use (includes acrylic lens)
V0 = Cutoff visor (5° shielding)
VP = Cutoff visor (5° shielding) for natatorium (pool) w/ lens
F0 = Flared cutoff visor (horizontal shielding)
FP = Flared cutoff visor (horizontal shielding) natatorium w/ lens
XX = For modification not listed; include detailed description. Consult factory prior to specification

8 Destination Requirement

0 = UL listed or CSA certified for U.S.
J = UL listed or CSA certified for Canada

9 Color Temperature

27 = 2700K, 80+ CRI
30 = 3000K, 80+ CRI
35 = 3500K, 80+ CRI
40 = 4000K, 80+ CRI
4L = 4000K, 70+ CRI

Note: Additional CCT and CRI options are available; consult factory.

10 Dimming*

00 = Non-dimming
ZX = 0-10V analog dimming 120-277V or 347V input, dimming range 100%-5%, 0-10V controls by others
EL = eldoLED SOLOdrive 120-277V input, 0-10V analog gamma corrected dimming 100%-0.1% power (controls by others)
ED = eldoLED SOLOdrive 120-277V input, dimming range 100%-0.1%, DALI controls by others

*Dimming range refers to % power input, % light output will vary.

Refer to Driver Information document MA-1303

Required Mounting Hangers

Required mounting hangers for pendant mount fixtures are ordered and priced separately. See installation sheets on website. ***VPQ required for pendant mounting options 1 or 2:***

VPQ _____ = **Uplight pendant** 2" x 4" aluminum stem

0 = U.S.
J = Canada

0 = No option
P = Natatorium (pool)
F = Surface conduit feed
Q = Natatorium (pool) and surface conduit feed

C = Canopy (leveling plate ±5°)
S = Canopy with pivot up to 30°

Length in inches (36" min. up to 120" max.)

02 = Semigloss white
99 = Custom finish

1 = One-way
2 = Two-way



Note: Suitable structure required to support up to 90 lb/35 kg. For additional pendant specifications, see **thelightingquotient.com**.

DOE Lighting Facts label for S432,
216 LEDs @ 500 mA, 4000K/80+CRI shown.

elliptipar® with LED

elliptipar *from* **The Lighting Quotient**
114 Boston Post Road, West Haven, Connecticut 06516, USA
Voice 203.931.4455 • Fax 203.931.4464 • **thelightingquotient.com**

Certain products illustrated may be covered by applicable patents and patents pending. These specifications supersede all prior publications and are subject to change without notice. Copyright © 2017 Sylvan R. Shemitz Designs, LLC, all rights reserved.

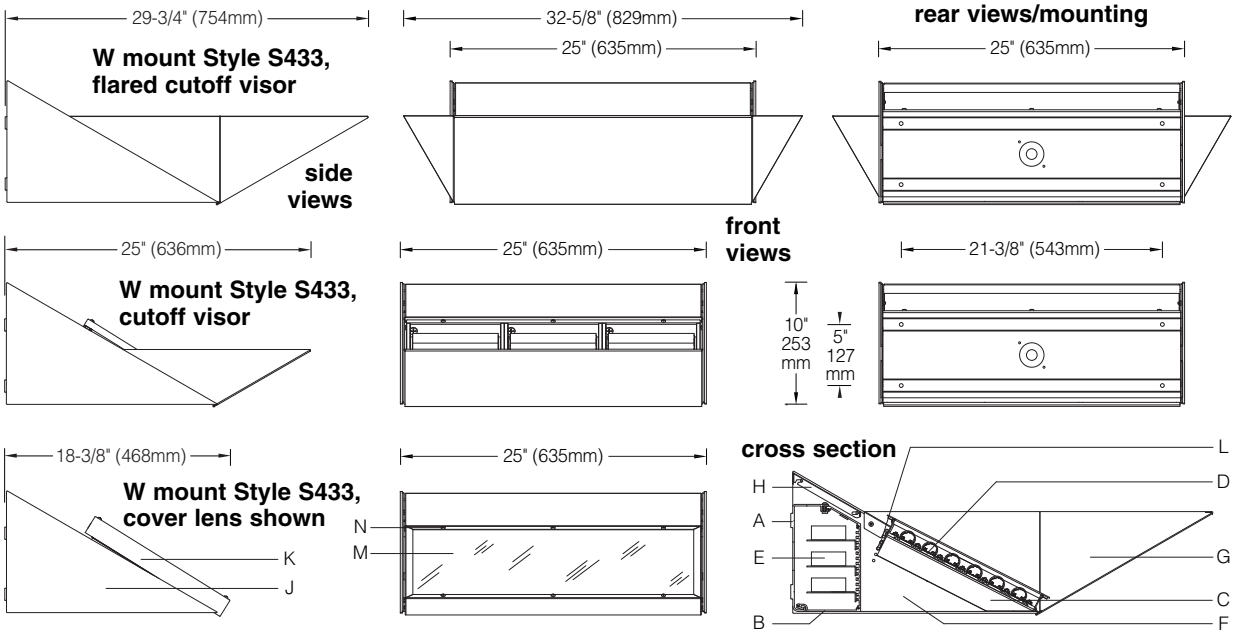

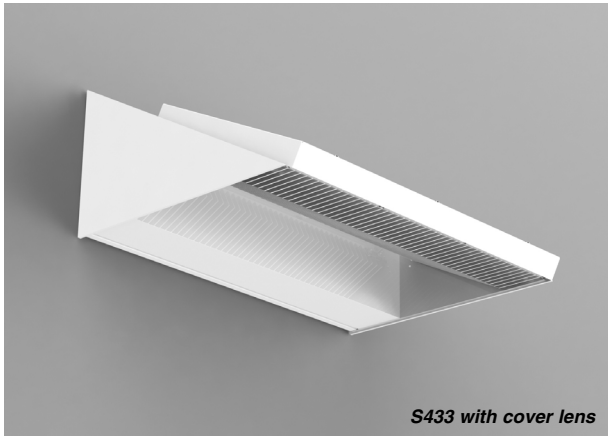
S433 with cover lens

Specifications

A Extruded aluminum mounting plate/driver cover

B Extruded aluminum driver housing

C Extruded aluminum heat sink/fixture head

D LED light engine

E Integral electronic driver

F Aluminum reveal plates

G Cutoff visor (flared shown)

H Decorative cover

J Aluminum sidearms

K Lens door

L Aiming latch

M Acrylic lens (**0P**, **VP**, **FP** options only)

N Door retaining screws

Housing and Optic Assembly:
Extruded aluminum heat sink/housing. Exterior heat sink anodized for maximum emissivity. Removable interior extrusion treated to maximize thermal conductivity. Precision extruded asymmetric optics of high temperature, water-clear polymer. Optional impact resistant exterior lens.

Finish:
Painted surfaces – 6 stage pretreatment and electrostatically applied thermoset polyester powder coating for a durable abrasion, fade and corrosion resistant finish. Formed aluminum visor. Extruded aluminum heat sink/housing, yoke, door frame, and decorative end plates are finished in semigloss white or specified custom color. All luminaire hardware is stainless steel.

Mounting:
Mounting plate covers recessed outlet box or conduit feed and forms reveal at wall. Suitable backing structure required (by others) – weight is approximately 45 lb/16.8 kg. Fixture hinges on plate for hands-free access to splices. Required upright pendant mounting assembly ordered and priced separately (see pg. SC24.1); specify mounting **1** or **2**.

Electrical:
Use 90°C wire for supply connections. Integral electronic HPF constant current driver. For complete driver specifications, see website, reference document **MA-1303**.

Standard:
UL listed or CSA certified for dry locations (optional damp location – specify pool option **0P**, **VP** or **FP**). 5 year warranty, maximum ambient temperature 40°C (104°F).

Features

- *Heavy duty heat sink maintains thermal regulation of LEDs*
- *All aluminum and stainless steel construction*
- *Natatorium option for harsh indoor pool environments*
- *Universal voltage drivers with programmable drive current*
- *Light engines are serviceable for replacement or upgrade*

SC 24.0

Performance

Precisely extruded polymer optics produce an asymmetric distribution ideal for illuminating ceilings evenly from one edge.

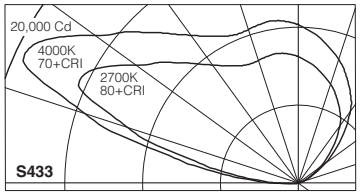

L90(10k) > 60,000 hrs @ 25°C per TM-21

For photometric and lumen maintenance reports, visit ***thelightingquotient.com***



LED lighting facts LED Product Partner

2017 PROGRESS Report SELECTION

elliptipar® with LED

To form a Catalog Number

S 4 3 3 - [1] - [2] - [3] - [4] - [5] - [6] - [7] - [8] - [9] - [10]

1 2 3 4 5 6 7 8 9 10

Project: _____ Type: _____

1 Source

S = Solid state (LED)

2 Style

433 = Large surface Ensconce® with integral driver

3 Lumen/Wattage Options

LAMP CODE	INPUT WATTS	LUMENS	NUMBER OF LEDs	DRIVE CURRENT
5324	503W	36081	324 LEDs	500mA

Based on visor option with 4000K, 80+CRI LEDs.
Click here for scaled performance table.

4 Mounting

W = Wall mount over recessed outlet box, uplight only
S = Wall mount side surface conduit, uplight only
T = Wall mount top surface conduit, uplight only
1 = 1-way pendant uplight, one fixture — required mounting hanger ordered and priced separately
2 = 2-way pendant uplight, two fixtures — required mounting hanger ordered and priced separately

SC 24.1

5 Finish

02 = Semigloss white
99 = Custom RAL or computer matched color to be specified; consult sales representative

6 Voltage/Driver

Electronic Driver	*Electronic Dimming Driver*
8 = 120-277V	**M** = 120-277V
3 = 347V	**K** = 347V

7 Option (See Accessories Section for specifications)

00 = No options
0P = Natatorium (pool) use (includes acrylic lens)
V0 = Cutoff visor (5° shielding)
VP = Cutoff visor (5° shielding) for natatorium (pool) w/ lens
F0 = Flared cutoff visor (horizontal shielding)
FP = Flared cutoff visor (horizontal shielding) natatorium w/ lens
XX = For modification not listed; include detailed description. Consult factory prior to specification

8 Destination Requirement

0 = UL listed or CSA certified for U.S.
J = UL listed or CSA certified for Canada

9 Color Temperature

27 = 2700K, 80+ CRI
30 = 3000K, 80+ CRI
35 = 3500K, 80+ CRI
40 = 4000K, 80+ CRI
4L = 4000K, 70+ CRI
Note: Additional CCT and CRI options are available; consult factory.

10 Dimming*

00 = Non-dimming
ZX = 0-10V analog dimming 120-277V or 347V input, dimming range 100%-5%, 0-10V controls by others
EL = eldoLED SOLOdrive 120-277V input, 0-10V analog gamma corrected dimming 100%-0.1% power (controls by others)
ED = eldoLED SOLOdrive 120-277V input, dimming range 100%-0.1%, DALI controls by others

*Dimming range refers to % power input, % light output will vary.
Refer to Driver Information document MA-1303

Required Mounting Hangers

Required mounting hangers for pendant mount fixtures are ordered and priced separately. See installation sheets on website. ***VPQ required for pendant mounting options 1 or 2:***

VPQ [1] [2] [3] [4] [5] [6] = **Uplight pendant** 2" x 4" aluminum stem

0 = U.S.
J = Canada

0 = No option
P = Natatorium (pool)
F = Surface conduit feed
Q = Natatorium (pool) and surface conduit feed

C = Canopy (leveling plate ±5°)
S = Canopy with pivot up to 30°

Length in inches (36" min. up to 120" max.)

02 = Semigloss white
99 = Custom finish

1 = One-way
2 = Two-way

Note: Suitable structure required to support up to 120 lb/45 kg. For additional pendant specifications, see **thelightingquotient.com**.



DOE Lighting Facts label for S433,
324 LEDs @ 500 mA, 4000K/80+CRI shown.

elliptipar® with LED

elliptipar *from* **The Lighting Quotient**
114 Boston Post Road, West Haven, Connecticut 06516, USA
Voice 203.931.4455 • Fax 203.931.4464 • **thelightingquotient.com**

Certain products illustrated may be covered by applicable patents and patents pending. These specifications supersede all prior publications and are subject to change without notice. Copyright © 2017 Sylvan R. Shemitz Designs, LLC, all rights reserved.

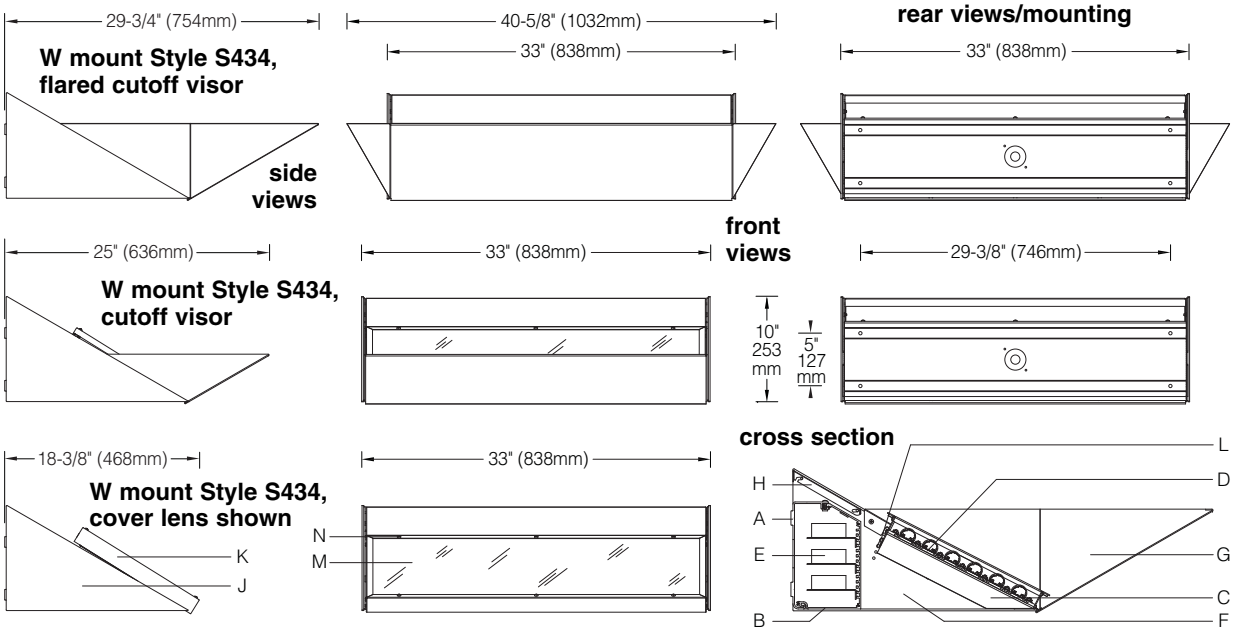

Specifications

A Extruded aluminum mounting plate/driver cover

B Extruded aluminum driver housing

C Extruded aluminum heat sink/fixture head

D LED light engine

E Integral electronic driver

F Aluminum reveal plates

G Cutoff visor (flared shown)

H Decorative cover

J Aluminum sidearms

K Lens door

L Aiming latch

M Acrylic lens (**0P**, **VP**, **FP** options only)

N Door retaining screws

Housing and Optic Assembly:
Extruded aluminum heat sink/housing. Exterior heat sink anodized for maximum emissivity. Removable interior extrusion treated to maximize thermal conductivity. Precision extruded asymmetric optics of high temperature, water-clear polymer. Optional impact resistant exterior lens.

Finish:
Painted surfaces – 6 stage pretreatment and electrostatically applied thermoset polyester powder coating for a durable abrasion, fade and corrosion resistant finish. Formed aluminum visor. Extruded aluminum heat sink/housing, yoke, door frame, and decorative end plates are finished in semigloss white or specified custom color. All luminaire hardware is stainless steel.

Mounting:
Mounting plate covers recessed outlet box or conduit feed and forms reveal at wall. Suitable backing structure required (by others) – weight is approximately 60 lb/22.4 kg. Fixture hinges on plate for hands-free access to splices. Required upright pendant mounting assembly ordered and priced separately (see pg. SC25.1); specify mounting **1** or **2**.

Electrical:
Use 90°C wire for supply connections. Integral electronic HPF constant current driver. For complete driver specifications, see website, reference document **MA-1303**.

Standard:
UL listed or CSA certified for dry locations (optional damp location – specify pool option **0P**, **VP** or **FP**). 5 year warranty, maximum ambient temperature 40°C (104°F).

Features

- *Heavy duty heat sink maintains thermal regulation of LEDs*
- *All aluminum and stainless steel construction*
- *Natatorium option for harsh indoor pool environments*
- *Universal voltage drivers with programmable drive current*
- *Light engines are serviceable for replacement or upgrade*

SC 25.0

Performance

Precisely extruded polymer optics produce an asymmetric distribution ideal for illuminating ceilings evenly from one edge.

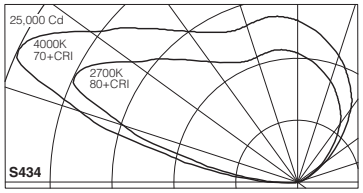

L90(10k) > 60,000 hrs @ 25°C per TM-21

For photometric and lumen maintenance reports, visit ***thelightingquotient.com***



LED lighting facts LED Product Partner

2017 PROGRESS Report SELECTION

elliptipar® with LED

To form a Catalog Number

S 4 3 4 - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

1 2 3 4 5 6 7 8 9 10

Project: _____

Type: _____

1 Source

S = Solid state (LED)

2 Style

434 = Large surface Ensconce® with integral driver

3 Lumen/Wattage Options

LAMP CODE	INPUT WATTS	LUMENS	NUMBER OF LEDs	DRIVE CURRENT
5432	669W	46320	432 LEDs	500mA

Based on visor option with 4000K, 80+CRI LEDs.
Click here for scaled performance table.

4 Mounting

W = Wall mount over recessed outlet box, uplight only
S = Wall mount side surface conduit, uplight only
T = Wall mount top surface conduit, uplight only
1 = 1-way pendant uplight, one fixture — required mounting hanger ordered and priced separately
2 = 2-way pendant uplight, two fixtures — required mounting hanger ordered and priced separately

SC 25.1

5 Finish

02 = Semigloss white
99 = Custom RAL or computer matched color to be specified; consult sales representative

6 Voltage/Driver

Electronic Driver	*Electronic Dimming Driver*
8 = 120-277V	**M** = 120-277V
3 = 347V	**K** = 347V

7 Option (See Accessories Section for specifications)

00 = No options
0P = Natatorium (pool) use (includes acrylic lens)
V0 = Cutoff visor (5° shielding)
VP = Cutoff visor (5° shielding) for natatorium (pool) w/ lens
F0 = Flared cutoff visor (horizontal shielding)
FP = Flared cutoff visor (horizontal shielding) natatorium w/ lens
XX = For modification not listed; include detailed description. Consult factory prior to specification

8 Destination Requirement

0 = UL listed or CSA certified for U.S.
J = UL listed or CSA certified for Canada

9 Color Temperature

27 = 2700K, 80+ CRI
30 = 3000K, 80+ CRI
35 = 3500K, 80+ CRI
40 = 4000K, 80+ CRI
4L = 4000K, 70+ CRI

Note: Additional CCT and CRI options are available; consult factory.

10 Dimming*

00 = Non-dimming
ZX = 0-10V analog dimming 120-277V or 347V input, dimming range 100%-5%, 0-10V controls by others
EL = eldoLED SOLOdrive 120-277V input, 0-10V analog gamma corrected dimming 100%-0.1% power (controls by others)
ED = eldoLED SOLOdrive 120-277V input, dimming range 100%-0.1%, DALI controls by others

*Dimming range refers to % power input, % light output will vary.

Refer to Driver Information document MA-1303

Required Mounting Hangers

Required mounting hangers for pendant mount fixtures are ordered and priced separately. See installation sheets on website. ***VPQ required for pendant mounting options 1 or 2:***

VPQ [ ] [ ] [ ] [ ] [ ] [ ] = **Uplight pendant** 2" x 4" aluminum stem

0 = U.S.
J = Canada

0 = No option
P = Natatorium (pool)
F = Surface conduit feed
Q = Natatorium (pool) and surface conduit feed

C = Canopy (leveling plate ±5°)
S = Canopy with pivot up to 30°

Length in inches (36" min. up to 120" max.)

02 = Semigloss white
99 = Custom finish

1 = One-way
2 = Two-way

Note: Suitable structure required to support up to 150 lb/56 kg. For additional pendant specifications, see **thelightingquotient.com**.

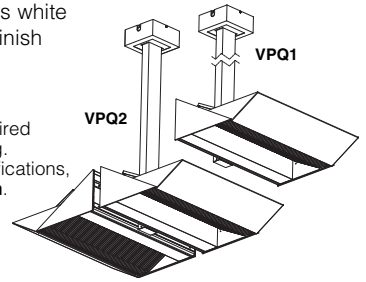

DOE Lighting Facts label for S434,
432 LEDs @ 500 mA, 4000K/80+CRI shown.

elliptipar® with LED

elliptipar *from* **The Lighting Quotient**
114 Boston Post Road, West Haven, Connecticut 06516, USA
Voice 203.931.4455 • Fax 203.931.4464 • **thelightingquotient.com**

Certain products illustrated may be covered by applicable patents and patents pending. These specifications supersede all prior publications and are subject to change without notice. Copyright © 2017 Sylvan R. Shemitz Designs, LLC, all rights reserved.