

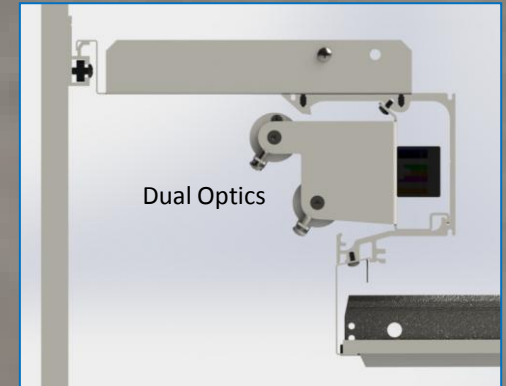


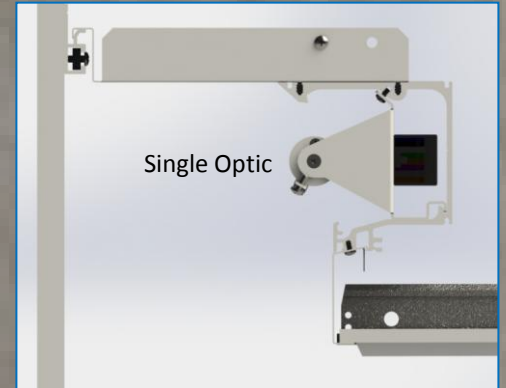

S330 / iLas2

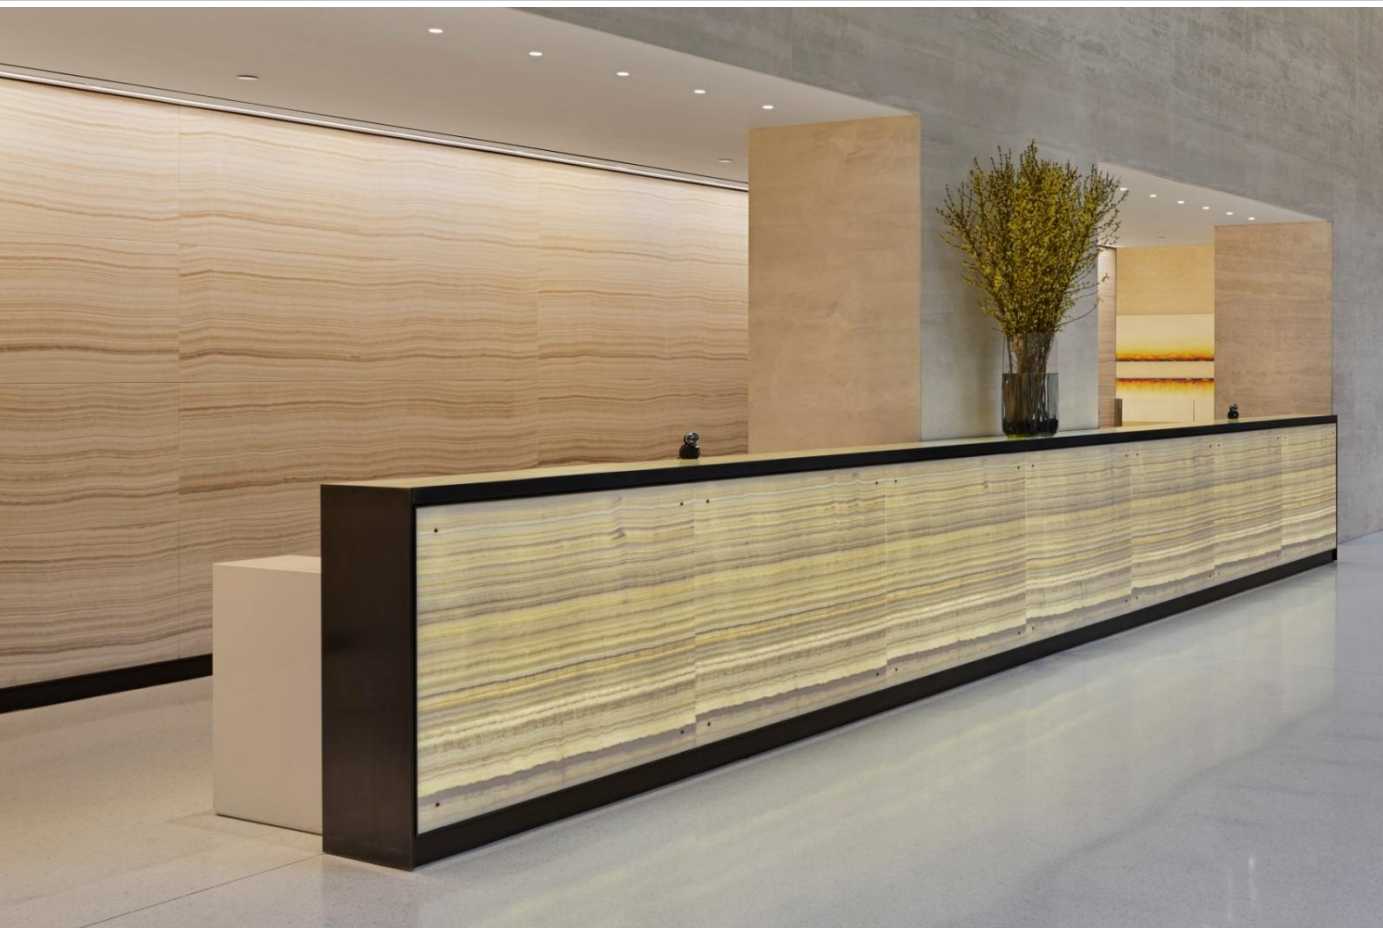


## Performance Perimeter Pocket


elliptipar® tambient® electriX® MEYER®  
thelightingquotient.com

## S330 Dimensions

Single Adjustable Head – Sheetrock Ceiling

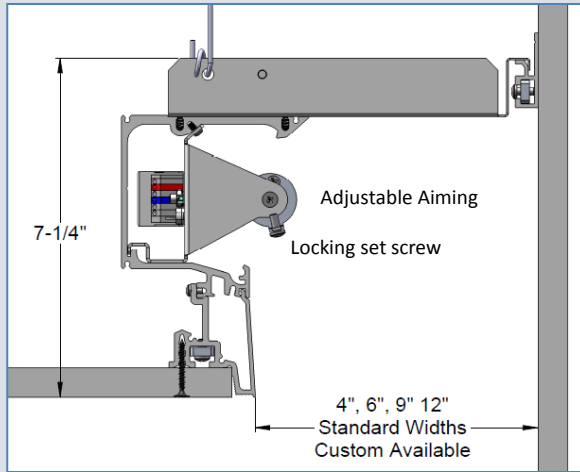

Dual Adjustable Heads (T-bar ceiling)

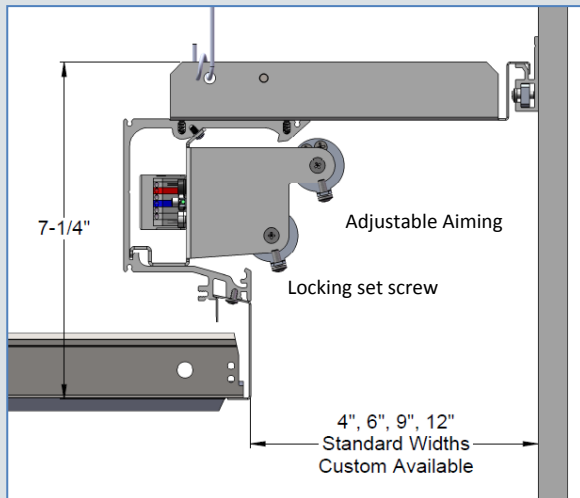


## Features

- Integrated pocket framing system
- Lengths up to 6 feet
- Extruded aluminum framing
- Single or Dual head options
- Fully adjustable aiming
- Interlocking heads allow aiming of entire row
- Wall wash and Grazer optics
- Illuminate walls up to 40ft tall
- Up to 3200 lm/ft delivered
- Up to 131 lm/W
- 90CRI / R9>50 standard
- Tunable white or RGBW options
- Optional cross baffles
- Excellent lumen maintenance
- Field serviceable integral driver
- Controls options - POE, 0-10V, DALI, DMX, 120V ELV/Triac
- 5-year warranty
- Made in the U.S.A


## Performance

Wall Wash Single Optic (3500K 90CRI)  
9" setback, 20ft Wall (49fc avg.)

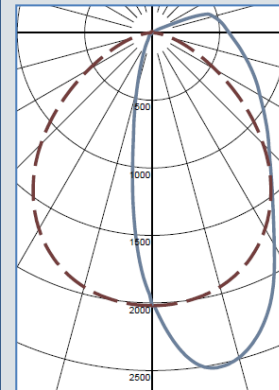

FT	FC
19	288
18	187
17	116
16	74
15	51
14	37
13	29
12	23
11	19
10	16
9	14
8	13
7	11
6	10
5	10
4	9.4
3	8.9
2	8.7
1	8.5

Grazing & WW Dual Optic (3500K 90CRI)  
12" Setback, 40ft Wall (41fc avg.)

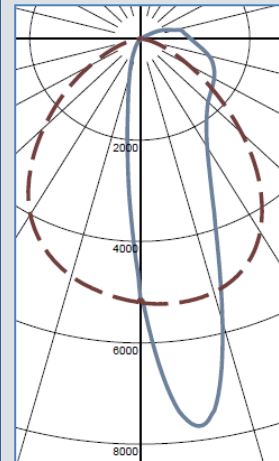

FT	FC
38	240
36	133
34	103
32	67
30	47
28	34
26	26
24	21
22	18
20	15
18	13
16	12
14	10
12	9.5
10	8.8
8	8.1
6	7.7
4	7.3
2	7.0