




Semi-Recessed Adjustable LED

CEILING MOUNTED T Mount

WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS TO BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY.

CAUTION – BE SURE POWER IS DISCONNECTED PRIOR TO WIRING.

INSTALL IN ACCORDANCE WITH ALL N.E.C. AND LOCAL ELECTRICAL CODES.

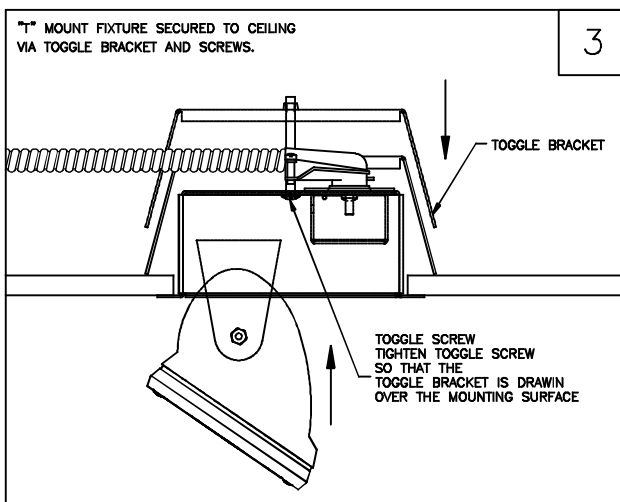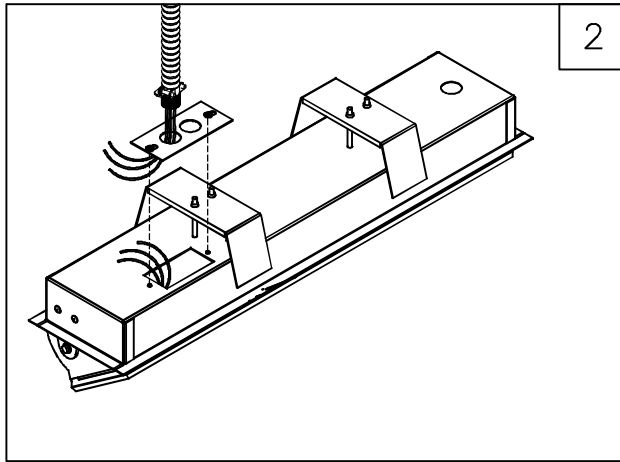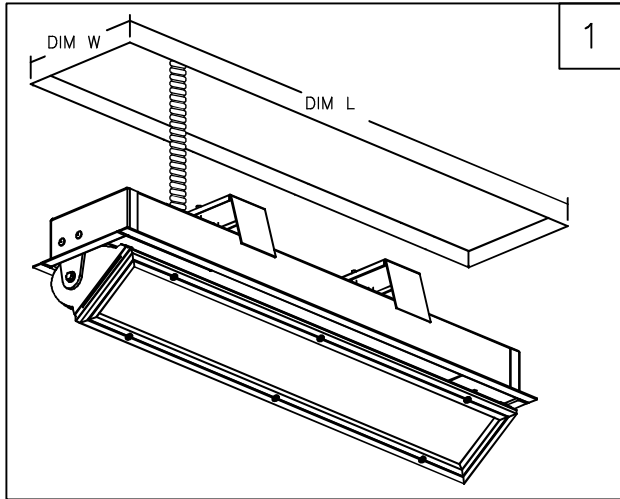


ROUGH OPENING

FIXTURE	DIM L	DIM W
1x2FT	23-3/8" (594mm)	4-3/4" (121mm)
1x3FT	35-3/8" (899mm)	4-3/4" (121mm)
1x4FT	47-3/8" (1203mm)	4-3/4" (121mm)

INACCESSIBLE/SHEETROCK CEILINGS ("T" MOUNTING CODE)

- 1) PLOT FIXTURE LOCATIONS PER LIGHTING PLANS AND RUN SUPPLY WIRING (BY OTHERS) TO FIXTURE LOCATIONS. CUT ROUGH OPENING IN CEILING OR CEILING TILE. (SEE CHART)
- 2) SPLICE FIXTURE WIRING TO SUPPLY WIRING (BLACK TO LINE, WHITE TO NEUTRAL AND GREEN TO GROUND) OR FOLLOW WIRING DIAGRAM ON BALLAST. CAREFULLY TUCK SPLICES INTO BACK BOX AND REPLACE ADAPTER PLATE AND SECURE PLATE WITH SCREWS.
- 3) RAISE FIXTURE UP THROUGH OPENING IN CEILING, THE LEGS OF TOGGLE BRACKET WILL SPRING OPEN ABOVE THE CEILING, TIGHTEN THE TOGGLE SCREWS UNTIL FLANGE OF BACK BOX IS FLUSH TO CEILING.
- 4) ONCE THE TOGGLE BRACKET HAS BEEN TIGHTENED, ROTATE REFLECTOR UPWARD TO DESIRED AIMING AND SECURE BY TIGHTENING HEX BOLTS AT ENDS OF FIXTURE. (SEE YELLOW LABEL ON DOOR FOR AIMING INSTRUCTIONS)

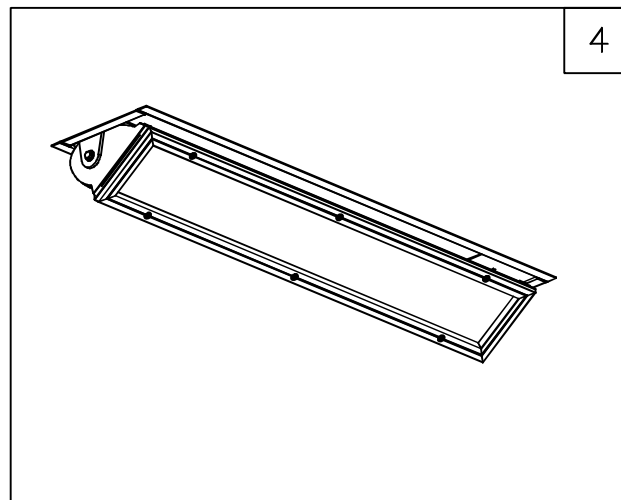

© COPYRIGHT ELLIPTIPAR 2013

MA-1316 REV A CATALOG NO. S215-[] [] [] [] -T-[] -[] [] []

elliptipar

CONFIDENTIAL PROPRIETARY INFORMATION
 THE INFORMATION HEREIN IS OF A PROPRIETARY NATURE AND IS SUBMITTED IN CONFIDENCE FOR USE BY OUR CLIENTS, CUSTOMERS OR VENDORS ONLY. UNAUTHORIZED REPRODUCTION, PUBLICATION, DISTRIBUTION OR DISSEMINATION, IN WHOLE OR IN PART, IS EXPRESSLY PROHIBITED. THE INFORMATION CONTAINED HEREIN IS AND REMAINS THE PROPERTY OF ELLIPTIPAR INC. AND RECEIPT OR POSSESSION OF THIS INFORMATION CONFERS NO RIGHT IN OR LICENSE TO OR TO DISCLOSE TO OTHERS THE SUBJECT MATTER CONTAINED HEREIN FOR ANY BUT AUTHORIZED PURPOSES. ALL RIGHTS RESERVED.

114 ORANGE AVENUE/WEST HAVEN/CONNECTICUT/06516